


Data Sheet

Code: Es 9223 03

Brand: TECNOPLAST 2000 SAS

Model: 65 LD30

Year: 2003

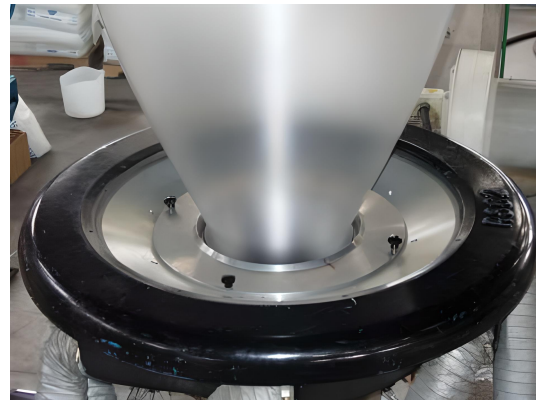

Description:

Single Layer Blown Film Line

Material: LDPE and COMPOSTABLE

Film working width: 600 / 1.600 mm.

Die diameter: 100-200-300 mm. ? air gap=1,4 - Blow Up Ratio (BUR) =1,5-4,5

Film thickness: 30 / 200 ?

Thickness tolerance: sigma 2 ± 8%

Production: 100 / 160 kg/h (with ambient temperature at 25° C) the flow rate can vary according to the thickness of the film, the width of the tube and the type of raw materials used

Maximum production speed: 80 m/min

Finished reels maximum diameter: 1000 mm

Cardboard mandrels diameter: 3" (internal diameter)

Twin winder type BA-2/1800

Line total height: 9 m

All the mentioned technical data are merely intended to describe the item, they are subject to change without any notice and refer to the standard conditions of a new good. A used good might not have the same figures as the new one.



01MACHINERY s.r.l. Via Dante, 49 - 60043 Cerreto D'Esì (AN) ITALIA

Tel. +39 0732 678956 - Fax: +39 0732 670008

info@01machinery.com www.01machinery.com

All the mentioned technical data are merely intended to describe the item, they are subject to change without any notice and refer to the standard conditions of a new good. A used good might not have the same figures as the new one.

01MACHINERY s.r.l. via Dante 49 60043 Cerreto d'Esì (AN) Italia - Tel +39 0732 678956 - Fax +39 0732 670008 - P.I. 01562600435